


CYCLONE BOLT
as specified by engineer
INTERNAL LINING

STRUCTURAL BRACING
of wall frame as required

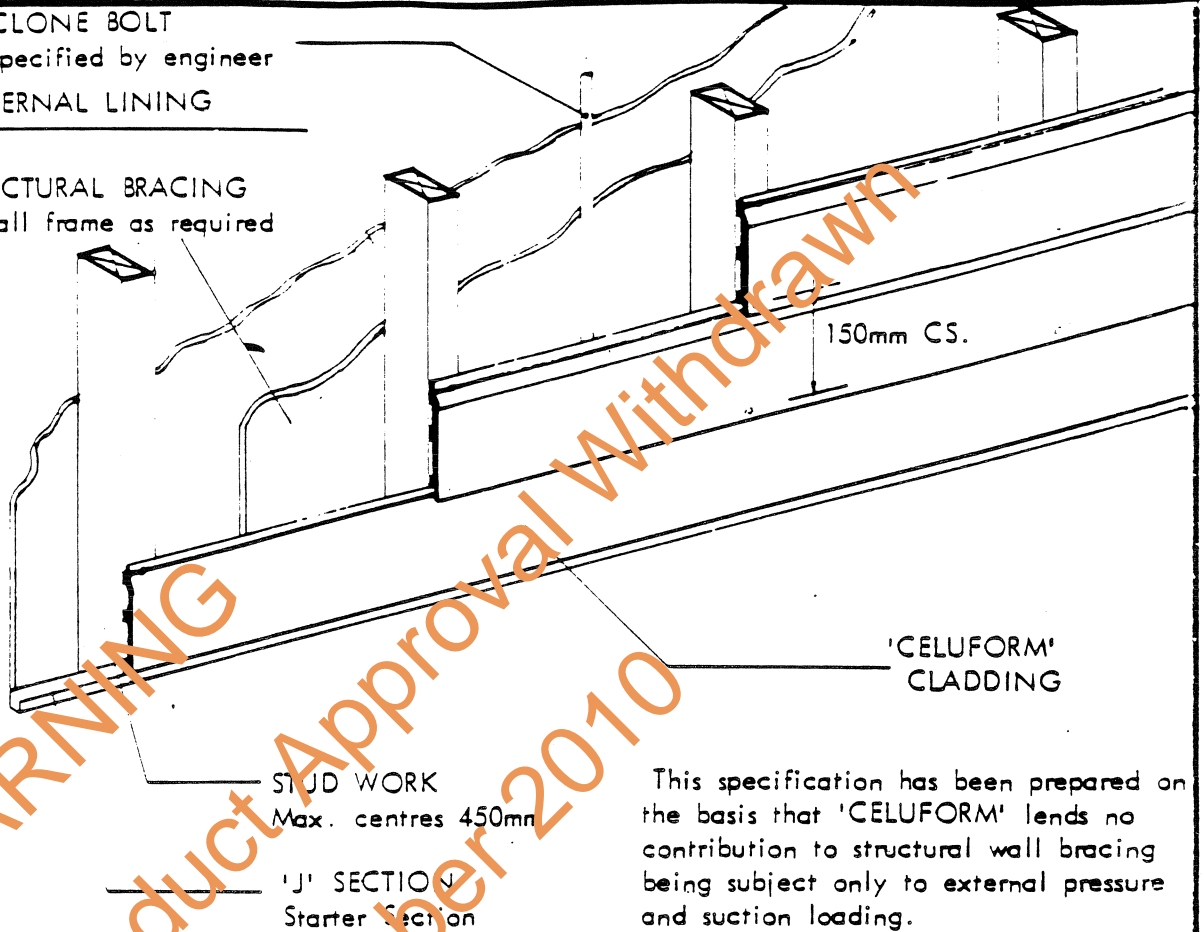

This specification has been prepared on the basis that 'CELUFORM' lends no contribution to structural wall bracing being subject only to external pressure and suction loading.


'CELUFORM' - WHITE, RIGID P.V.C. CLADDING
nominal 16mm
length 5m
width 150mm

FRAME - Maximum stud spacing is 450mm (18 in) except area designated F in A 51170 - Part 2 - 1975. Appendix B where terrain category factor is 1.02. Spacing is then reduced to 300mm (12 in)

NAILS - 40mm serrated plasterboard nails as tested by AMDEL 17.6.'77 Report No MT 3961/77

- Spacing. 1 nail per plank, per stud, placed along nailing bead.

FURTHER INFORMATION - Iplex SPECIAL BUILDING PRODUCTS. SPECIFICATION SHEETS.

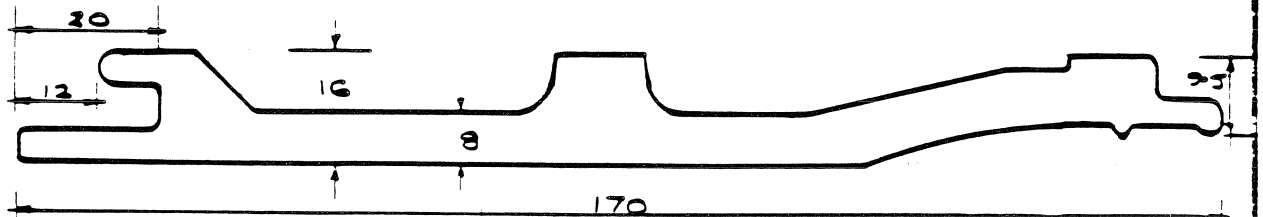

MANUF's
NAME: IPLEX PLASTIC IND'S

ADDRESS: PHILIP HIGHWAY,
ELIZABETH, SOUTH AUSTRALIA.
ADEL: 2557666
DARWIN: 843380 PHONE NO.

FIXING OF 'CELUFORM'

IN THE DARWIN AREA

DESIGN DATA SHEET

NORTHERN TERRITORY
CYCLONIC AREAS.

DRG. No

CERTIFIED DATE
DATE

R.M. Kelly

DATE: 21/8/78

M/205/1