



AIRPORT DOORS

SERIES 130 x 0.8
ROLLER SHUTTER DOOR
FOR CYCLONIC AREAS

DOOR WIDTH (m)	WIND LOCK SPACING (mm)	ALLOWABLE WIND LOAD (kPa)	DESIGN FORCES (kN/m)	
			P	Q
6.0	250	1.42	25.4	4.3
5.5	250	1.63	25.4	4.5
	500	0.95	12.7	2.6
5.0	250	1.89	25.4	4.7
	500	1.10	12.7	2.8
4.5	250	2.23	25.4	5.0
	500	1.49	12.7	3.4
4.0	250	2.69	25.4	5.4
	500	1.60	12.7	3.2
3.5	250	3.33	25.4	5.8
	500	2.00	12.7	3.5
3.0	250	3.70	21.2	5.6
	500	2.58	12.7	3.9
2.5	-	1.30	-	1.6
	250	3.70	13.8	4.6
	500	3.50	12.7	4.4

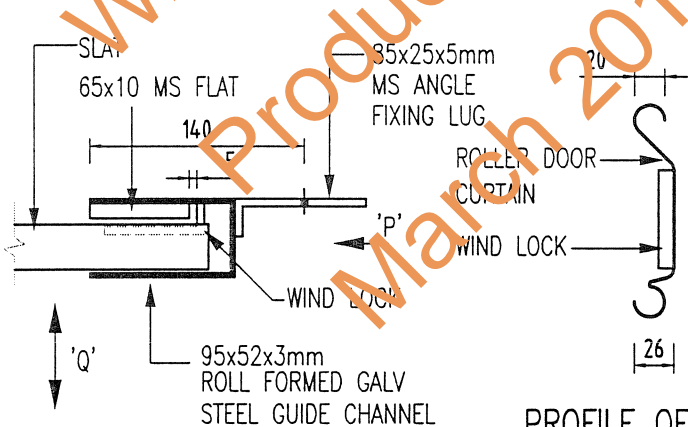

PLAN DETAIL ON
ROLLER DOOR GUIDE

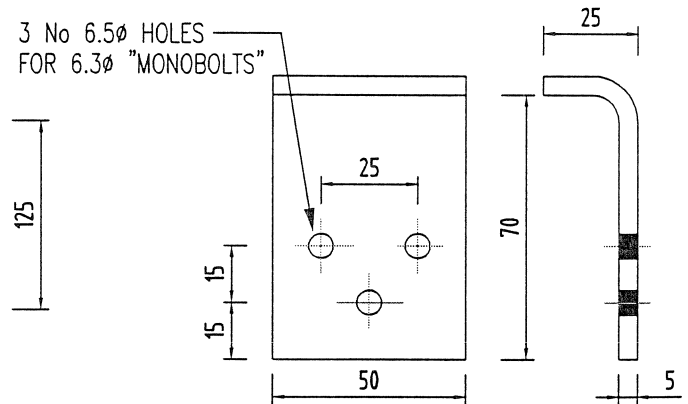

ELEVATION OF WINDLOCK
GRADE 250 STEEL

PROFILE OF SERIES
130 ROLLER SHUTTER
CURTAIN SLAT

NOTE: GRADE 300 STEEL
'P' AND 'Q' ARE THE DESIGN FORCES (kN/m) TO BE CARRIED BY THE GUIDE FIXINGS AND SUPPORT MEMBERS

APPROVED FOR INCLUSION IN THE NT DEEMED TO COMPLY MANUAL
BY THE B.A.C. DATE: 15/5/98

Civil - Environmental
Structural - Geotechnical
Mechanical - Electrical
Fire - Security
Lifts - Hydraulics

21A Cavenagh Street
G.P.O. Box 3700, Darwin, N.T. 0801
Telephone 61 89 410 626
Facsimile 61 89 410 277
ACN 062 965 888 / 008 080 046



AIRPORT DOORS
SERIES 130 x 0.8 ROLLER SHUTTER
DOOR WITH WINDLOCKS

DESIGN DATA SHEET

NORTHERN TERRITORY
CYCLONIC AREAS

SHEET No:
M/408/2

CERTIFIED *W. Anup*

DATE: 3/4/98

JOB No: 9803060

APPROVED *W. Anup*

DATE: 14.4.98